




LED PLASTIC TUBE -4'



BENEFITS

- New Nano Plastic Technology
- Protection against glass broken and electric shock
- Similar appearance to traditional tube


ADVANTAGES

- Glass tube with protect film
- Even light output

APPLICATION

- Commercial, Residential, Office, Parking lot etc.

LIGHT CURVE DIAGRAM

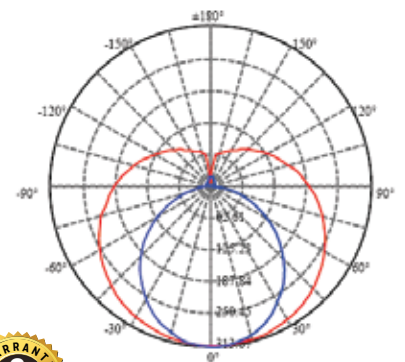

SPECIFICATIONS

FEATURES

Shape	Plastic Tube
Cap/Fitting	GU13
Dimmable	No
Type	T8 TUBE
Voltage	100-240 V

LIGHT ATTRIBUTES

Light Output	1650(DL) / 1500 (WL) lumen
Beam Angle	210 degree
Color Temperature	6500 K (DL) / 3000 K (WL)
Light Effective/Finish	Day Light / Warm White
Color Rendering Index (CRI)	70
Starting Time	Instant 60% light
Power Factor	>0.5
Lamp Current	163 mA

ROBUSTNESS

Lifetime	15000 hours
Number of Switch Cycle	20,000
Lumen Maintenance	0.7
Average Life (at 5 Hrs/Day)	13+ years

DIMENSION

Height	1199.4 mm
Width	28 mm

RATED VALUES

Wattage	18 W
Rated Lumen Flux	1650(DL) / 1500 (WL) lm
Wattage Equivalent	36 W
Certification	ROHS