




**SLIM PANEL LIGHT - 4"**



**BENEFITS**

- Ultra-slim light design
- Nice and consistent lighting colour with even light distribution
- Quick and easy installation


**ADVANTAGES**

- Two spring options to match different installation cut-outs
- High colour reducing index


**APPLICATION**

- Restaurant, Offices, Commercial Hospitals etc.

**MEASUREMENT**



**LIGHT CURVE DIAGRAM**

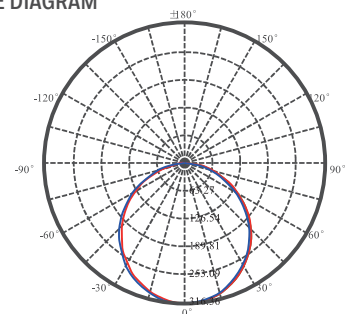

**SPECIFICATIONS**

**FEATURES**

Shape	Round
Cut-out	100mm
IP Rated	20
Type	Slim Panel Light
Voltage	100-240 V

**LIGHT ATTRIBUTES**

Light Output	350 (DL) / 320 (WL) lumen
Beam Angle	112 degree
Color Temperature	6500 K (DL) / 3000 K (WL)
Light Effective/Finish	Day Light / Warm White
Color Rendering Index (CRI)	80
Starting Time	Instant light
Power Factor	>0.7
Lamp Current	30 mA

**ROBUSTNESS**

Lifetime	25000 hours
Number of Switch Cycle	12,500
Lumen Maintenance	0.9
Average Life (at 5 Hrs/Day)	13 years

**DIMENSION**

Height	19 mm
Width	115 mm

**RATED VALUES**

Wattage	6.5 W
Rated Lumen Flux	350 (DL) / 320 (WL) lm
ESMA Approved	Yes
Certification	CE CB ROHS