




SLIM PANEL LIGHT - 8"




-  25000 Hrs Life
-  Power 18 W
-  Lumen 1300 lm / 1200 lm

- BENEFITS**
- Ultra-slim light design
 - Nice and consistent lighting colour with even light distribution
 - Quick and easy installation
- ADVANTAGES**
- Two spring options to match different installation cut-outs
 - High colour reducing index
- APPLICATION**
- Restaurant, Offices, Commercial Hospitals etc.

MEASUREMENT



LIGHT CURVE DIAGRAM

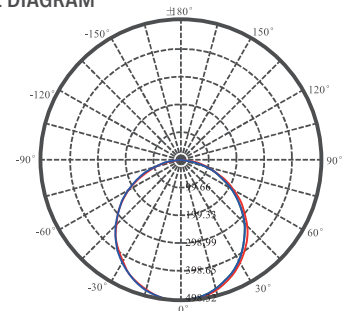

SPECIFICATIONS

FEATURES

Shape	Square
Cut-out	200mm
IP Rated	20
Type	Slim Panel Light
Voltage	100-240 V

ROBUSTNESS

Lifetime	25000 hours
Number of Switch Cycle	12,500
Lumen Maintenance	0.9
Average Life (at 5 Hrs/Day)	13 years

LIGHT ATTRIBUTES

Light Output	1300 (DL) / 1200 (WL) lumen
Beam Angle	112 degree
Color Temperature	6500 K (DL) / 3000 K (WL)
Light Effective/Finish	Day Light / Warm White
Color Rendering Index (CRI)	80
Starting Time	Instant light
Power Factor	>0.7
Lamp Current	90 mA

DIMENSION

Height	19 mm
Width	215 mm

RATED VALUES

Wattage	18 W
Rated Lumen Flux	1300 (DL) / 1200 (WL) lm
ESMA Approved	Yes
Certification	CE CB ROHS